

IC-BR250-0722

2 Megapixel Full HD Network Water-proof IR-Bullet Camera



Features

- > 1/3" 2 Megapixel progressive scan Exmor CMOS
- > H.264 & MJPEG dual-stream encoding
- > Max 25fps@1080P(1920×1080)
- > Day/Night(ICR), Auto Iris, Micro SD card Slot
- > DWDR, 3DNR, Auto iris, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > Varifocal Lens: 7~22mm
- > Max. IR LEDs Length 30m
- > IP66, PoE, DC12V
- > Material: Plastic (upper cover)+ Metal (the rest)

IC-BR250-0722


Technical Specifications

Model		IC-BR250-0722	
Camera			
Image Sensor		1/3" 2 Megapixel Exmor CMOS	
Effective Pixels		1920(H)x1080(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual 1/3~1/10000	
Min. Illumination		Color: 0. 01LUX/F1.2, B/W: 0.005LUX/F1.2, 0Lux (IR on)	
S/N Ratio		>50dB	
Video Output		1 channel BNC (1.0Vp-p, 75Ω)	
Camera Features			
Max. IR LEDs Length		100m	
Day/Night		Auto(ICR) / Color / B/W	
Backlight Compensation		BLC / HLC / DWDR	
White Balance		Auto	
Gain Control		Auto/Manual	
Noise Reduction		3D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		7~22mm , Board-in Type, Max Aperture: F1.4	
Max Aperture		F1.4	
Focus Control		Manual	
Angle of View		H: 46.1° ~ 16.7°	
Lens Type		Manual / Auto Iris (DC)	
Mount Type		Board-in Type	
Video			
Compression		H.264 / MJPEG	
Resolution		1080P(1920×1080) / 720P(1280×720) /D1(704×576)	
Frame Rate	Main Stream	1080P(1 ~ 25fps)	
	Sub Stream	D1/CIF(1 ~ 25fps)	
Bit Rate		H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 20480Kbps	
Audio			
Compression		G.711a/G.711u(64kbps)/PCM(128kbps)	
Interface		1/1 channel In/Out	
Network			
Ethernet		RJ-45 (10/100Base-T)	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
ONVIF		ONVIF Profile S	
Max. User Access		20 users	
Smart Phone		iPhone, iPad, Android, Windows Phone	
Auxiliary Interface			

IC-BR250-0722

Memory Slot	Micro SD, Max 32GB
Alarm	2/1 channel In/Out
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	<16W
Working Environment	-20°C~+60°C, Less than 95% RH
Ingress Protection	IP66
Dimensions	288mm x 118mm x 101mm
Weight	2.5 Kg

Dimensions (mm)

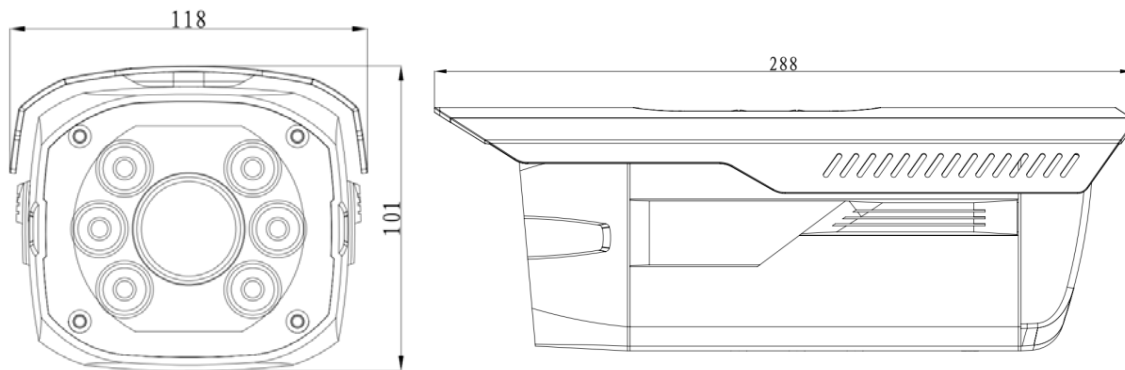

Wall-Mount Bracket

