

IC-BR250

2 Megapixel Full HD Network Water-proof IR-Bullet Camera



Features

- > 1/3" 2 Megapixel progressive scan Exmor CMOS
- > H.264 & MJPEG dual-stream encoding
- > Max 25fps@1080P(1920×1080)
- > Day/Night(ICR), Auto Iris, Micro SD card Slot
- > DWDR, 3DNR, Auto iris, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > Varifocal Lens: 3.3~12mm
- > Max. IR LEDs Length 30m
- > IP66, PoE, DC12V
- > Material: Plastic (upper cover)+ Metal (the rest)

IC-BR250



Technical Specifications

Model		IC-BR250
Camera		
Image Sensor		1/3" 2 Megapixel Exmor CMOS
Effective Pixels		1920(H)x1080(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual 1/3~1/10000
Min. Illumination		Color: 0. 1LUX/F1.2, B/W: 0.01LUX/F1.2, 0Lux (IR on)
S/N Ratio		>50dB
Camera Features		
Max. IR LEDs Length		30m
Day/Night		Auto(ICR) / Color / B/W
Backlight Compensation		BLC / HLC / DWDR
White Balance		Auto
Gain Control		Auto/Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		3.3~12mm , Board-in Type, Max Aperture: F1.4
Angle of View		H: 87.5° ~ 31.1°
Video		
Compression		H.264 / MJPEG
Resolution		1080P(1920×1080) / 720P(1280×720) /D1(704×576)
Frame Rate	Main Stream	1080P(1 ~ 25fps)
	Sub Stream	D1/CIF(1 ~ 25fps)
Bit Rate		H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 20480Kbps
Network		
Ethernet		RJ-45 (10/100Base-T)
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
ONVIF		ONVIF Profile S
Max. User Access		20 users
Smart Phone		iPhone, iPad, Android, Windows Phone
Auxiliary Interface		
Memory Slot		Micro SD, Max 32GB
Alarm		1/1 channel In/Out
General		
Power Supply		DC12V, PoE (802.3af)
Power Consumption		<7.5W
Working Environment		-20°C~+60°C, Less than 95% RH
Ingress Protection		IP66

IC-BR250

Dimensions	Φ104mm x 306.7mm
Weight	1.25Kg

Dimensions (mm)

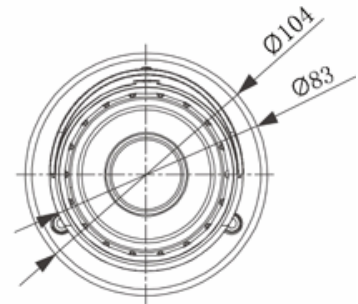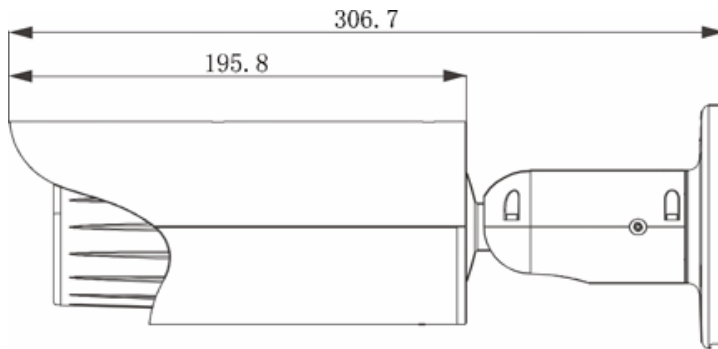

Accessory (optional)

		
PFA130	PFA150	PFA151