

IC-BR350

3 Megapixel Water-proof IR Network Vandal Dome Camera



Features

- 1/3" 3 Megapixel progressive scan Aptina CMOS
- H.264 & MJPEG dual-stream encoding
- Max 20fps@3M(2052x1536), 25fps@1080P(1920x1080)
- DWDR, Day/Night(ICR), 3DNR, Auto Iris, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- Varifocal Lens: 2.7~12mm
- Max. IR LEDs Length 30m
- Built-in 2/1 alarm in/out
- Micro SD memory, IP66, PoE, DC12V

IC-BR350



Technical Specifications

Model		IC-BR350	
Camera			
Image Sensor		1/3” 3 Megapixel Aptina CMOS	
Effective Pixels		2048(H) x 1536(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual 1/3~1/10000	
Min. Illumination		Color: 0. 1LUX/F1.4, 0Lux (IR on)	
S/N Ratio		More than 50dB	
Camera Features			
Max. IR LEDs Length		30m	
Day/Night		Auto(ICR) / Color / B/W	
Backlight Compensation		Off / BLC / HLC / DWDR	
White Balance		Auto	
Gain Control		Auto / Manual	
Noise Reduction		3D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		2.7~12mm , Board-in Type, Aperture: F1.4	
Angle of View		H: 82° ~ 25°	
Lens Type		Manual / Auto Iris(DC)	
Video			
Compression		H.264 / MJPEG	
Resolution		3M(2048x1536) / 1080P(1920×1080) / 720P(1280×720) /D1(704×576)	
Frame Rate	Main Stream	3M(1~20fps) / 1080P/720P(1 ~ 25fps)	
	Sub Stream	D1/CIF(1 ~ 25fps)	
Bit Rate		H.264: 16K ~ 8192Kbps	
Audio			
Compression		G.711a / G.711u/ PCM	
Interface		1/1 channel In/Out	
Network			
Ethernet		RJ-45 (10/100Base-T)	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
ONVIF		ONVIF Profile S	
Max. User Access		20 users	
Smart Phone		iPhone, iPad, Android, Windows Phone	
Auxiliary Interface			
Memory Slot		Micro SD, Max 64GB	
Alarm		2/1 channel In/Out	
General			
Power Supply		DC12V, PoE (802.3af)	

IC-BR350

Power Consumption	<7W
Working Environment	-20°C~+60°C, Less than 95% RH
Protection	Vandal: IP66
Dimensions	Φ1041mm x 306.7mm
Weight	1.25Kg

Dimensions (mm)

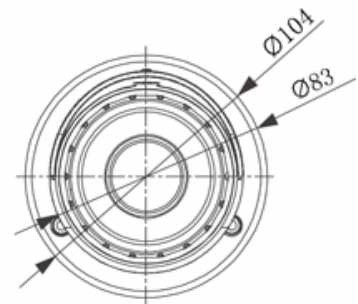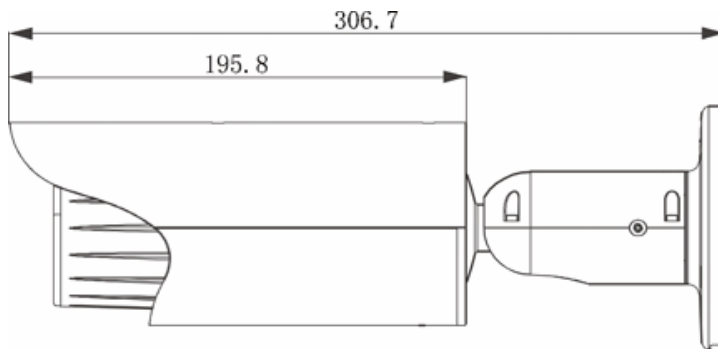

Accessory (optional)

		
PFA130	PFA150	PFA151