

IC-DR220

Full HD Mega pixel IR Dome IP Camera



Features

- > 1/3" 3 Mega pixel progressive scan CMOS
- > H.264 & MJPEG dual-stream encoding
- > Max 25fps@1080P(1920×1080)/720P(1280x720)
- > Day/Night(ICR), 2DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 3.6mm fixed lens
- > Max. IR LEDs Length 20m
- > IP66, PoE


IC-DR220

Technical Specifications


Model		IC-DR220	
Camera			
Image Sensor		1/3" 3 Mega pixel Progressive Scan CMOS	
Effective Pixels		2048(H)x1536(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual 1/3~1/10000	
Min. Illumination		Color: 0. 1LUX/F1.2, B/W: 0.01LUX/F1.2, 0Lux (IR on)	
S/N Ratio		>50dB	
Camera Features			
Max. IR LEDs Length		20m	
Day/Night		Auto(ICR) / Color / B/W	
Backlight Compensation		BLC / HLC	
White Balance		Auto/Manual	
Gain Control		Auto/Manual	
Noise Reduction		2D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		3.6mm	
Max Aperture		F1.6	
Angle of View		H: 71.9°	
Mount Type		Board-in Type	
Video			
Compression		H.264 / MJPEG	
Resolution		1080P(1920×1080) / 720P(1280×720) / D1(704×576)	
Frame Rate	Main Stream	1080P(1 ~ 25fps)	
	Sub Stream	D1/CIF(1 ~ 25fps)	
Bit Rate		H.264: 16K ~ 8192Kbps	
Network			
Ethernet		RJ-45 (10/100Base-T)	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
ONVIF		ONVIF Profile S	
Max. User Access		10 users	
Smart Phone		iPhone, iPad, Android, Windows Phone	
General			
Power Supply		DC12V, PoE (802.3af)	
Power Consumption		<4.8W	
Working Environment		-10°C~+60°C, 10%~90%	
Ingress Protection		IP66	
Dimensions		Φ10863.5 x 86mm	
Weight		360g	

IC-DR220

Dimensions (mm)

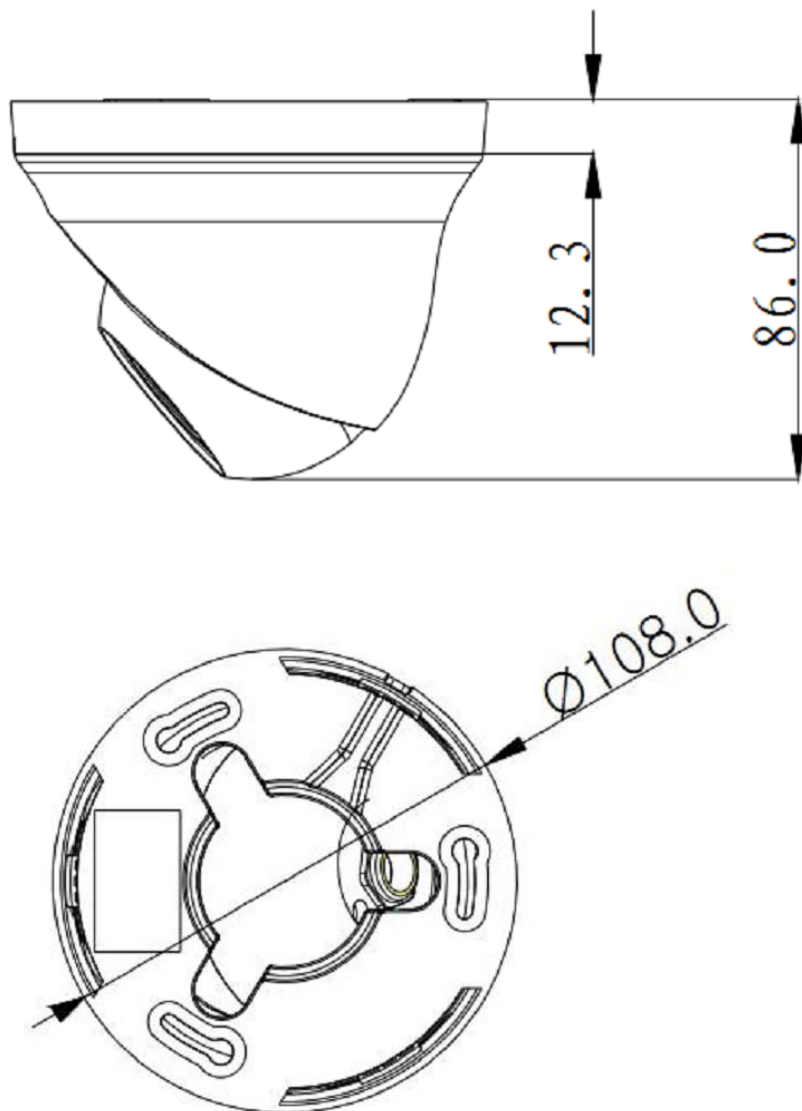

Accessory (optional)

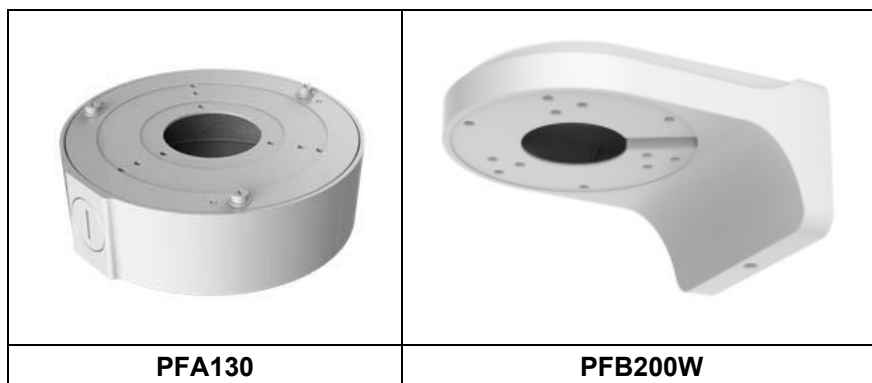

IC-DR220
