

IC-DR340C

3 Megapixel Water-proof IR Network Vandal Dome Camera



Features

- 1/3" 3 Megapixel progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max 20fps@3M(2052x1536), 25fps@1080P(1920×1080)
- DWDR, Day/Night(ICR), 3DNR, Auto Iris, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- Fixed Lens: 2.8mm / 6 mm
- Max. IR LEDs Length 30m
- Microphone in-built
- IK10, IP66, PoE, DC12V

IC-DR340C


Technical Specifications

Model		IC-DR340C
Camera		
Image Sensor		1/3" 3 Megapixel progressive scan PS CMOS
Effective Pixels		2052 (H) x 1536(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual 1/3~1/10000
Min. Illumination		Color: 0.01LUX/F1.2, 0Lux (IR on)
S/N Ratio		More than 50dB
Camera Features		
Max. IR LEDs Length		30m
Day/Night		Auto(ICR) / Color / B/W
Backlight Compensation		Off / BLC / HLC / DWDR
White Balance		Auto
Gain Control		Auto / Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		2.8mm / 6mm , Board-in Type, Aperture: F1.8
Angle of View		H: 90° ~ 44°
Lens Type		Manual / Auto Iris(DC)
Video		
Compression		H.264 / MJPEG
Resolution		3M(2048x1536) / 1080P(1920x1080) / 720P(1280x720) / D1(704x576)
Frame Rate	Main Stream	3M(1~20fps) / 1080P/720P(1 ~ 25fps)
	Sub Stream	D1/CIF(1 ~ 25fps)
Bit Rate		H.264: 16K ~ 8192Kbps
Audio		
Compression		G.711a / G.711u / PCM
Interface		Built-in MIC
Network		
Ethernet		RJ-45 (10/100Base-T)
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
ONVIF		ONVIF Profile S
Max. User Access		20 users
Smart Phone		iPhone, iPad, Android, Windows Phone
General		
Power Supply		DC12V, PoE (802.3af)
Power Consumption		<4.5W
Working Environment		-20°C~+60°C, Less than 95% RH

IC-DR340C

Protection	Ingress: IK10 Vandal: IP66
Dimensions	Φ107.9mm x 84.1mm
Weight	0.4Kg

Dimensions (mm)

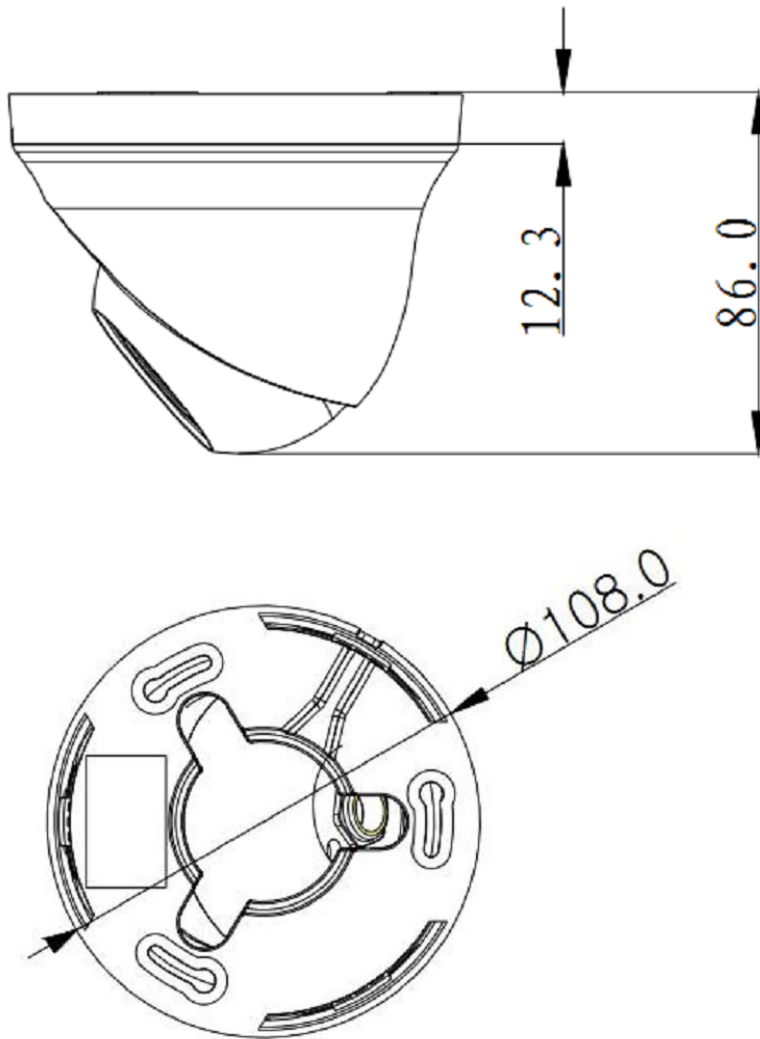

Accessory (optional)

