

IC-DR240

2 Megapixel Full HD Vandal-proof Network Mini Dome Camera



Features

- > **1/3" 2 Megapixel progressive scan Exmor CMOS**
- > **H.264 & MJPEG dual-stream encoding**
- > **Max 25fps@1080P(1920×1080)**
- > **Day/Night(Electronic), 3DNR, Auto iris, AWB, AGC, BLC**
- > **Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS**
- > **3.6mm fixed lens**
- > **Micro SD memory**
- > **IP66, IK10, PoE**


IC-DR240

Technical Specifications

Model		IC-DT240	
Camera			
Image Sensor		1/3” 2 Megapixel Exmor CMOS	
Effective Pixels		1920(H)x1080(V)	
Scanning System		Progressive	
Electronic Shutter Speed		Auto/Manual 1/3~1/10000	
Min. Illumination		Color: 0. 01LUX/F1.2	
S/N Ratio		>50dB	
Camera Features			
Day/Night		Auto(ICR) / Color / B/W	
Backlight Compensation		BLC / HLC / DWDR	
White Balance		Auto/Manual	
Gain Control		Auto/Manual	
Noise Reduction		3D	
Privacy Masking		Up to 4 areas	
Lens			
Focal Length		3.6mm (2.8mm)	
Max Aperture		F1.8	
Angle of View		H: 70° (97.24°)	
Lens Type		Manual/Auto Iris (DC)	
Mount Type		Board-in Type	
Video			
Compression		H.264 / MJPEG	
Resolution		1080P(1920×1080) / 720P(1280×720) / D1(704×576)	
Frame Rate	Main Stream	1080P(1 ~ 25fps)	
	Sub Stream	D1/CIF(1 ~ 25fps)	
Bit Rate		H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 20480Kbps	
Network			
Ethernet		RJ-45 (10/100Base-T)	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
ONVIF		ONVIF Profile S	
Max. User Access		20 users	
Smart Phone		iPhone, iPad, Android, Windows Phone	
General			
Power Supply		DC12V, PoE (802.3af)	
Power Consumption		<3W	
Working Environment		-20°C~+60°C, Less than 95% RH	
Ingress Protection		IP66, IK10	
Dimensions		Φ110 x 54 mm	
Weight		250g	

IC-DR240

Dimensions (mm)

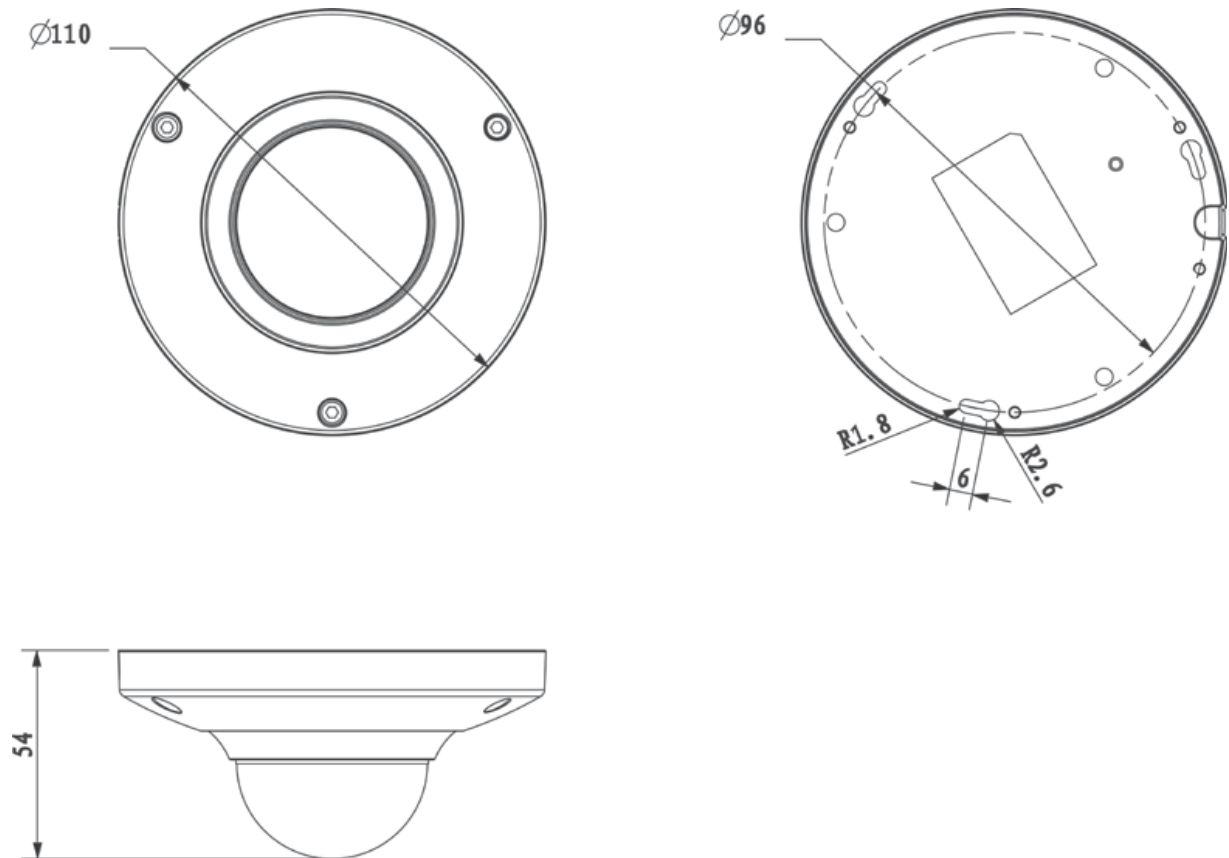

Accessory (optional)

