

IC-DTR250

2 Megapixel Water-proof IR Network Vandal Dome Camera



Features

- > 1/3" 2 Megapixel progressive scan Exmor CMOS
- > H.264 & MJPEG dual-stream encoding
- > Max 25fps@1080P(1920×1080)
- > DWDR, Day/Night(ICR), 3DNR, Auto Iris, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > Varifocal Lens: 2.7~12mm
- > Max. IR LEDs Length 20m
- > Built-in 1/1 alarm in/out
- > Micro SD memory, IK10, IP66, PoE, DC12V

IC-DTR250



Technical Specifications

Model		IC-DTR250
Camera		
Image Sensor		1/3" 2 Megapixel Exmor CMOS
Effective Pixels		1920(H)x1080(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual 1/3~1/10000
Min. Illumination		Color: 0. 1LUX/F1.4, 0Lux (IR on)
S/N Ratio		More than 50dB
Camera Features		
Max. IR LEDs Length		20m
Day/Night		Auto(ICR) / Color / B/W
Backlight Compensation		Off / BLC / HLC / DWDR
White Balance		Auto / Manual
Gain Control		Auto / Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		2.7~12mm , Board-in Type, Aperture: F1.4
Angle of View		H: 105.6° ~ 27.4°
Video		
Compression		H.264 / MJPEG
Resolution		1080P(1920×1080) / 720P(1280×720) /D1(704×576)
Frame Rate	Main Stream	1080P(1 ~ 25fps)
	Sub Stream	D1/CIF(1 ~ 25fps)
Bit Rate		H.264: 16K ~ 8192Kbps
Network		
Ethernet		RJ-45 (10/100Base-T)
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
ONVIF		ONVIF Profile S
Max. User Access		20 users
Smart Phone		iPhone, iPad, Android, Windows Phone
Auxiliary Interface		
Memory Slot		Micro SD, Max 32GB
Alarm		1/1 channel In/Out
General		
Power Supply		DC12V/AC24V, PoE (802.3af)
Power Consumption		<7W
Working Environment		-20°C~+60°C, Less than 95% RH
Protection		Ingress: IK10 Vandal: IP66
Dimensions		Φ151mm x 119mm

IC-DTR250

Weight	1.25Kg
--------	--------

Dimensions (mm)

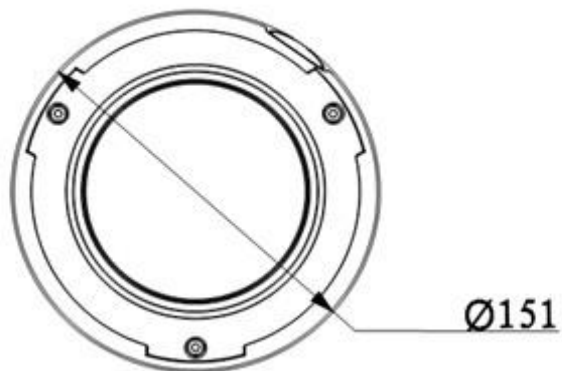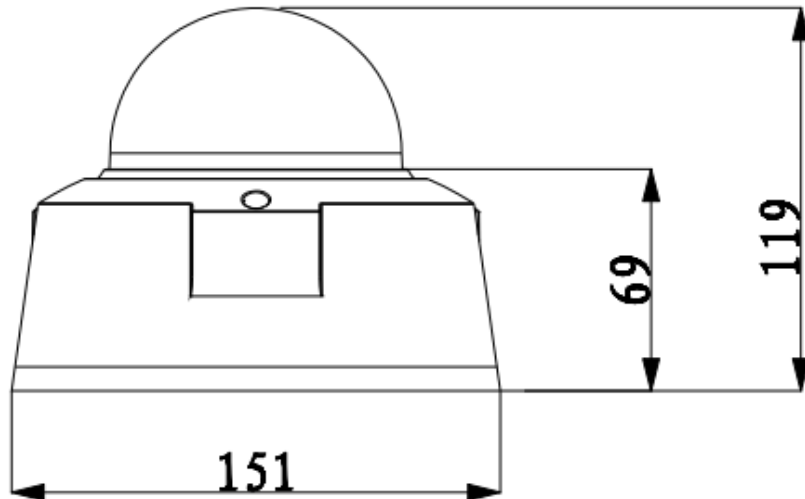

Accessory (optional)

		
PFA130	PFA150	PFA151