

NVR5208-8P



NVR5208-8P NVR (Network Video Recorder)

Description

NVR5208-8P NVR (Network Video Recorder) is a high performance network video surveillance system for high-end, convenient, and reliable IP-based real-time monitoring and video recording. Powered by Dual-core embedded processor CPU, the Linux-embedded NVR supports 8 channel H.264 and M-JPEG recording from Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotek and etc. IP-based security cameras. With high performance handle capacity, **64 Mbps**, **NVR5208-8P** NVR supports long-term and high performance megapixel recording (up to **5 megapixels**) from various IP cameras anytime, anywhere over the web, independent of any PC. and smart mobile phone, iPhone, iPad, Adroid.


NVR5208-8P NVR offers high quality video recording and is yet simple to use and easy to maintain. It is an ideal end-to-end network surveillance system for system integrators, SMB, and enterprise users.


Powerful Features

- Up to 8 channel with 1080P realtime live view
- H.264/MJPEG dual codec decoding
- Up to **5 megapixels** resolution ip camera
- Max **64 Mbps** incoming bandwidth
- **1080P** HDMI/VGA simultaneous video output
- 1 / 4 / 9 channel synchronous realtime playback, GRID interface
- 1 / 4 / 8 / 9 channel synchronous realtime preview, GRID interface
- ONVIF Version 2.0 conformance
- Support **2 SATA** HDDs up to 8TB, 2 USB2.0
- Support IPC UPnP, **8 PoE** ports
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & iPhone, iPad, Adroid(DMSS)



System Connection

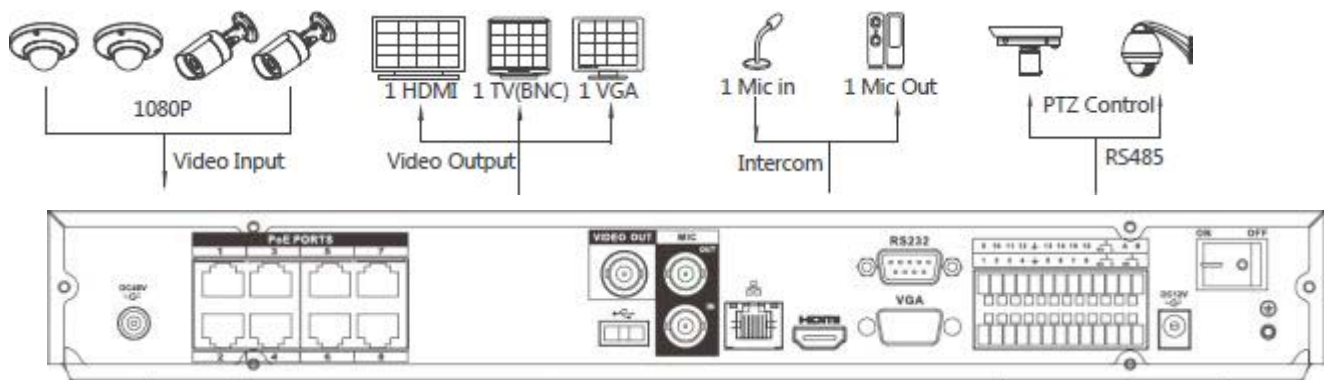

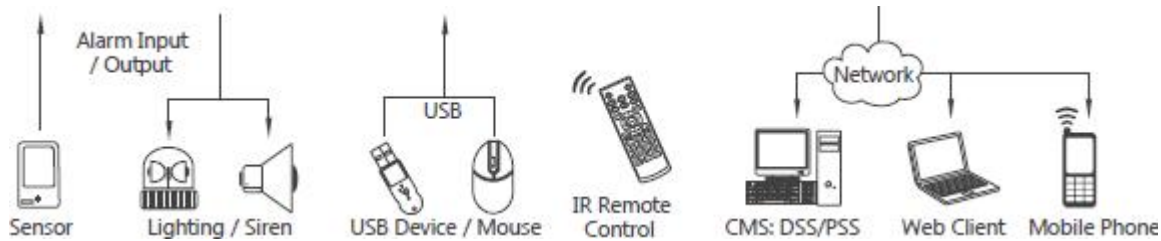

PC CMS Software

- Register up to 1000 channels connection and 64 live viewing at 1 screen, support max 121(11x11) view
- Support DVRs, video servers, IP cameras, decoders and other network products connection.
- PTZ, bidirectional talk, camera settings, color adjustment
- Support device management, configuration, reboot and other operations
- Support decoder connection to realize virtual matrix system and video wall display
- Support different alarm types: external, motion detection, video loss, camera masking and etc.
- Support video monitoring project, layout configuration, recording plan and etc.
- Device status and other information provided in the "health report"
- Support video search from local PC, device itself and other storage center
- Used for the central monitoring system



Mobile Phone Surveillance Software



iDMSS for ios System :

gDMSS for Android System :

DMSS for Blackberry System :

DMSS for Symbian System :

DMSS for Window Mobile System :

DMSS for Windows System :

Support iPhone OS 4.1 or higher and iPad

Support Android OS 2.0 or higher.

Support Blackberry OS 4.6 or higher (Not support 7.0 OS).

Support Symbian S60 3rd.

Support Windows Mobile OS 5.0 or higher.

Support Windows Phone OS 7.0 or higher

Technical Specifications

NVR5208-8P

Main Processor Dual-core embedded processor

Operating System Embedded LINUX

Video & Audio

IP Camera Input 8 channel

Two-way Talk 1 channel Input, 1 channel Output, BNC

Display

Interface 1 HDMI, 1 VGA, 1TV

Resolution 1920x1080, 1280x1024, 1280x720, 1024x768

Display Split 1 / 4 / 8 / 9

OSD Camera title, Time, Video loss, Camera lock, Motion detection, Recording

Recording

Compression H.264 / MJPEG

Resolution 5MP(2560x1920) / 3MP(2048x1536) / 1080P(1920x1080) / 1.3M(1280x960)/ 720P(1280x720) / D1(704x576/704x480) & etc.

Record Rate Max 64 Mbps

Bit Rate 48~ 8192kbps

Record Mode Manual, Schedule(Regular(Continuous), MD, Alarm), Stop

Record Interval 1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec

Video Detection & Alarm

Trigger Events Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Buzzer & Screen tips

Video Detection Motion Detection, MD Zones: 396(22x18), Video Loss & Camera Blank

Alarm Input 8 channel

Relay Output 3 channel

Playback & Backup

Sync Playback 1 / 4 / 9

Search Mode Time/Date, Alarm, MD & Exact search (accurate to second), Smart search

Playback Function Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom

Backup Mode USB Device / Network

Network

Ethernet 1 RJ-45 port (10/100/1000Mbps)

PoE 8 ports (IEEE802.3af)

Network Function HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)

Max. User Access 20 users

Smart Phone iPhone, iPad, Android, Windows Phone

Storage

Internal HDD 2 SATA ports, up to 8TB, Raid (redundancy)

Auxiliary Interface

USB 2 ports USB2.0

RS232 1 port, For PC communication & Keyboard

RS485 1 port, For PTZ control

General

Power Supply NVR: DC12V

Power Consumption 20W (without HDD), PoE Port: Max.15W (each)

Working Environment -10°C ~ +55°C / 10% ~ 90%RH / 86~106kpa

Dimension(WxDxH) 1U, 375mm x 285mm x 50mm

Weight 2.3KG (without HDD)